

Fissatubo Apribile tipo 2P

Openable Conduit-clip type 2P



Settori di Impiego / Areas of application



DESCRIZIONE / DESCRIPTION

I fissatubo apribili 2P in Poliammide 6 nero (PA6 SGA MOD BS) facilitano la corretta applicazione e scorrimento dei cavi protetti dalle guaine apribili ad un dispositivo. Il fissaggio tramite la vite centrale permette un facile montaggio del fissatubo in alloggiamenti o superfici singole. Fessure aggiuntive da entrambi i lati della staffa permettono l'applicazione di una fascetta di cavi al fine di migliorare la tenuta delle guaine apribili, se necessario.


Our straight openable 2P conduit-clips in black Polyamide 6 (PA6 SGA MOD BS) facilitate proper guiding and application of cables protected by openable conduits to an equipment. Centre screw fixation allows easy mounting of the support on individual surfaces and housings. Additional slits on both sides of the bracket allow the application of a standard cable tie for enhanced fixation strength of openable conduits, if required.

DATI TECNICI / TECHNICAL DATA

Materiale / Material	PA6 SGA MOD BS
Temperatura di Esercizio / Temperature Range	-45°C / +120°C
Privo di alogeni e cadmio / Halogen-cadmium free	SI / YES
Classe di reazione al fuoco / Fire classification	V2
Prova al filo incandescente / Glow wire test	850°C (EN 60695-2-10)
Indice di Ossigeno / Oxygen Index	> 28% (EN ISO 4589-2)

Fissatubo Apribile tipo 2P

Openable Conduit-clip type 2P

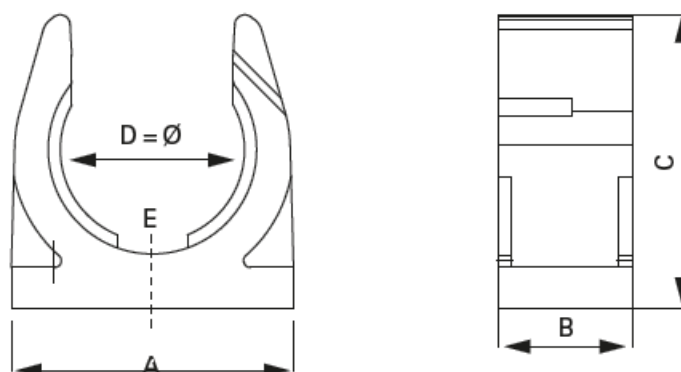

Settori di Impiego / Areas of application



Codice EURO 2000 EURO 2000 Code	Ø Nominale NW Ø	A	B	C	D	E	Confezione Package
P63107	7	15,0	20,0	17,5	9,7	M3	10
P63110	10	18,5	20,0	17,5	13,5	M5	10
P63111	11	21,0	20,0	22,5	16,0	M3	10
P63114	14	24,0	20,0	27,5	18,7	M5	10
P63116	16	30,0	20,0	35,0	21,6	M6	10
P63120	20	35,0	20,0	38,0	26,0	M6	10
P63123	23	41,6	20,0	43,0	31,3	M6	10
P63129	29	48,0	20,0	50,5	35,3	M6	10
P63137	37	56,0	20,0	56,6	41,8	M6	10
P63145	45	67,0	20,0	68,0	54,0	M6	10
P63170	70	100,0	20,0	100,0	79,8	M6	10