



Guaina tipo DMT-EVA

Conduit type DMT-EVA



EURO 2000

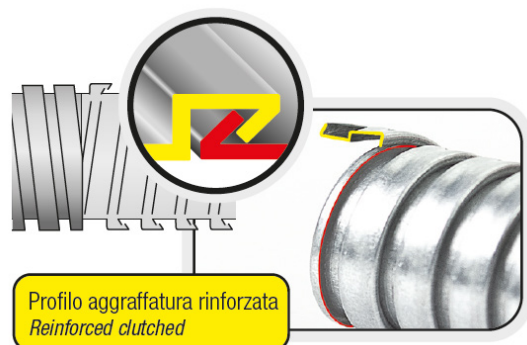

Profilo aggraffatura rinforzata
Reinforced clutched



Settori di Impiego / Areas of application



DESCRIZIONE / DESCRIPTION

Guaina pieghevole in acciaio zincato ad aggraffatura rinforzata e ricoperto in EVA termoplastico grigio, libero da alogeni, di leggero spessore aspirato sull'anima metallica e trecciato in acciaio zincato. Durante la combustione non si formano sostanze alogene riducendo al massimo la densità fumogena e la tossicità. Molto indicato ove sia richiesta una buona resistenza meccanica e un'ottima resistenza alla trazione, alla torsione e alla compressione

Pliable conduit with an internal metal clutch manufactured from galvanized steel and recovered in EVA grey thermoplastic material vacuum thin coating and overbraided in galvanized steel. During combustion doesn't develop halogen substances, reducing at maximum level smoke density and toxicity. It is particularly suited where is required a high mechanical resistance and an excellent resistance to traction, to torsion and to compression.

DATI TECNICI / TECHNICAL DATA

| | |
|---|---|
| Materiale <i>Material</i> | Acciaio zincato e EVA Galvanized steel and EVA |
| Norme di riferimento <i>Reference standards</i> | CEI EN 61386, EN 45545-2 (fumogena e la tossicità / toxic smoke) |
| Grado di Protezione <i>IP Rating</i> | IP66 / IP67 |
| Temperatura di servizio <i>Service temperature</i> | - 45 °C / +120°C |
| Resistenza alla trazione <i>Resistance to traction</i> | > 1000 N |
| Resistenza alla compressione <i>Resistance to traction</i> | > 1250 N |
| Autoestinguenza <i>Self-extinguishing</i> | Si Yes |

| Codice Code | ø int. ø int. (mm) | ø est. ø ext. (mm) | R. di curvatura Bend radius (mm) | Lunghezza matassa Reel length (m) | Peso / weight (gr/m) |
|----------------|--------------------------|--------------------------|--|--|-------------------------|
| DMT 210 EVA | 10,0 | 15,0 | 40 | 30 | 284 |
| DMT 212 EVA | 12,0 | 17,5 | 55 | 30 | 328 |
| DMT 216 EVA | 15,5 | 21,0 | 60 | 30 | 396 |
| DMT 221 EVA | 20,5 | 26,5 | 65 | 30 | 500 |
| DMT 227 EVA | 26,5 | 32,5 | 90 | 30 | 780 |
| DMT 235 EVA | 34,5 | 42,5 | 105 | 30 | 904 |
| DMT 240 EVA | 39,5 | 47,5 | 125 | 25 | 1240 |
| DMT 250 EVA | 50,5 | 57,5 | 185 | 25 | 1540 |

