


Pressacavi

con proteggicavo flessibile
Cable glands
with spiral top



Grigio RAL 7035
Grey RAL 7035

disegno dimensionale / reference details

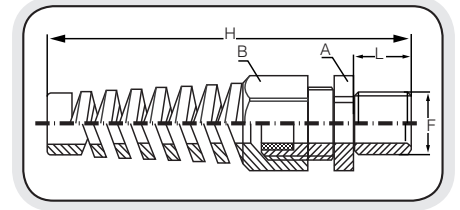

Settori di Impiego / Areas of application



Caratteristiche / Characteristics:

Pressacavi in plastica con proteggicavo flessibile. Filettatura metrica secondo EN 50262 e PG secondo DIN 40430. Grado di protezione IP67 secondo EN 60529. Temperatura di esercizio -40°C +100°C. Il particolare progetto del sistema di chiusura, del sistema di tenuta e della guarnizione, aumenta la durata del cavo. Resistente all'acqua, alla polvere, all'ambiente salino, agli acidi, agli alcali, ai grassi ed ai comuni solventi. Colore RAL7001

Plastic cable glands with spiral top. Metric thread in accordance with EN 50262 and PG in accordance with DIN 40430. IP protection IP67 in accordance with EN 60529. Temperature range -40°C +100°C. Special design of clamping die, sealing nut and rubber part, twisting resistance, prolonging cable life. Waterproof, dustproof and high ability to resist salt, acid, alkali, alcohol, grease and general solvent. Color RAL7001

Pressacavo con proteggicavo flessibile / Cable gland with flexible spiral top

Codice Code	Filetto Thread METRICO ISO 965 F	Cavi Cables ø min/max	L	Esagono Hexagon CH		H	Codice Code	Filetto Thread PG DIN 40430 F	Cavi Cables ø min/max	L	Esagono Hexagon CH		H	Confezione Package
				A	B						A	B		
44501	M12*1,5	3,0 - 6,0	9,0	16	16	70,0	-	-	-	-	-	-	-	100
44502	M16*1,5	4,0 - 8,0	9,0	18	20	80,0	44801	9	4,0 - 8,0	8,0	18	20	80	100
-	-	-	-	-	-	-	44802	11	5,0 - 10,0	9,0	23	23	80	50
-	-	-	-	-	-	-	44803	13,5	6,0 - 12,0	9,0	23	23	88	25
44503	M20*1,5	10,0 - 14,0	9,0	23	23	91,0	44804	16	10,0 - 14,0	10,0	26	26	92	50
44504	M25*1,5	11,0 - 18,0	12,0	33	33	112,0	-	-	-	-	-	-	-	25
-	-	-	-	-	-	-	44805	21	13,0 - 18,0	12,0	33	33	112	10

La fornitura dei pressacavi non include i controdadi / Lock nuts are excluded from cable glands supply